☢ AIPHONE

VIDEO SENTRY PanTilt
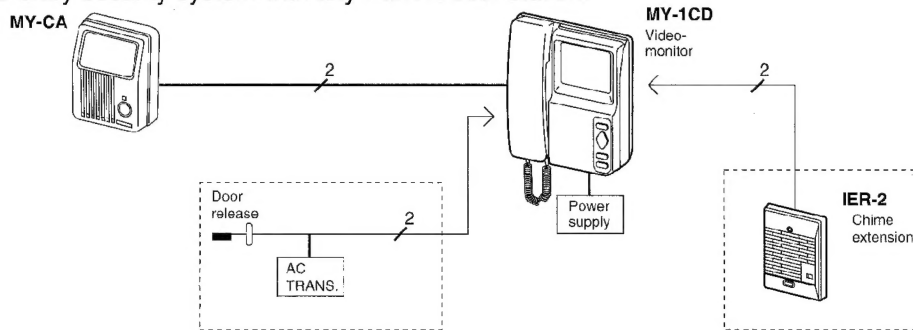# VIDEO ENTRY SECURITY SYSTEM

Model; **MY-1CD**

INSTALLATION & OPERATION MANUAL

1 SYSTEM OUTLINE & FEATURES

SYSTEM LAYOUT EXAMPLE

MY-1CD is a video-monitor, with Aiphone's exclusive Pan-and-Tilt control pad.
Can make one-entry security system with any PanTilt door station.

FEATURES

Basic 1 monitor to 1 door entry security system, with capability of pan-and-tilting door camera.

☆ Uses a parallel 2-conductor cable
☆ Use with surface MY-CA or MY-DC (DG), semi-flush.
☆ Sharp and clear image on 4" direct view flat screen
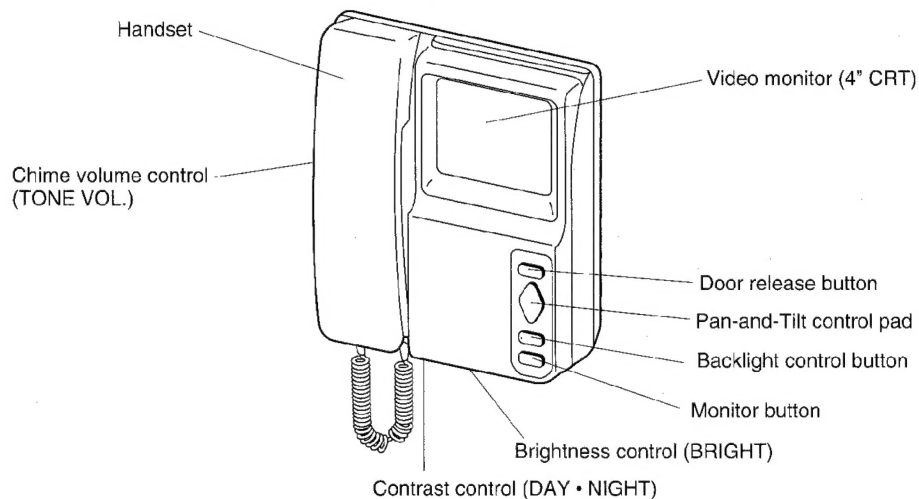☆ Monitor button activates door camera for entry checking

Additional features

☆ MY-CA mounts porch light high in MYW-CA overhead camera
   enclosure. Use with IF-DA door station
☆ Long distance application with MYW-BA long-distance adaptor
   (max. 300m w/1.2mm dia.)

Check with the package contents;
• Video-monitor (MY-1CD)
• Mounting bracket
• Stand & screw (2) (desk use)
• Screws-pack
• Installation & Operation Manual

2 NAMES AND FUNCTIONS

- Handset
- Video monitor (4" CRT)
- Chime volume control (TONE VOL.)
- Door release button
- Pan-and-Tilt control pad
- Backlight control button
- Monitor button
- Brightness control (BRIGHT)
- Contrast control (DAY • NIGHT)

MY-1CD video-monitor

MY-1CD are designed for indoor use only. Do not mount the video-monitor in the following places as it may cause the system to malfunction;
- High temperature areas, or near equipment that varies in temperature.
- Extreme cold temperature areas
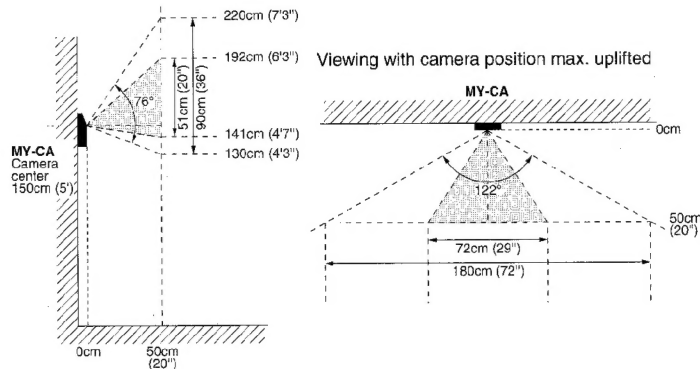- Places subject to moisture or humidity extremes.

Mount the video-monitor so that the center of monitor screen comes to the eye level of the user.

Strong
light
source

PanTilt door station

MY PanTilt door station employs CCD camera system and the performance can be affected by bright direct light: strong sunlight, gate light, or street or porch light which come directly into the camera lens.

As shown, the image viewing area can be expanded by activating door station camera. The MY-CA door station may be used as overhead camera, by placing inside the MYW-CA enclosure.

220cm (7'3")
192cm (6'3")   Viewing with camera position max. uplifted
MY-CA
76°
51cm (20")
90cm (36")
141cm (4'7")   0cm
130cm (4'3")
MY-CA
Camera
center
150cm (5')
122°
50cm
(20")
72cm (29")
180cm (72")
0cm   50cm
(20")

: Shows viewing area of horizontal camera position.

Pantilt camera vision at 50 cm (20") distance
(vertical x horizontal)

Camera	Horizontal Viewing	Pantilt viewing
MY-CA	51cm x 72cm 20" x 29"	90cm x 110~180cm 36" x 43"~72"
MY-DC MY-DG	49cm x 66cm 19" x 26"	90cm x 180cm 36" x 72"

- MY-CA in MYW-CA, downviews the area of 4.7m vert. x 8.4m horiz. (16' x 28') max. from 3 m (10') distance above.

On bottom of Pantilt door back case, cable inlet holes are provided. Do not apply the back case with caulking seals, etc. Rainwater may pass through these holes.
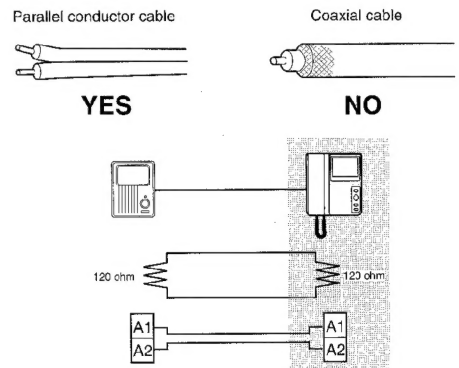
Call extension

One IER-2 speaker can be added to sound a chime tone in a remote location. Connect non-polarized wires from SG, – terminal on MY-1CD.

Wiring Precautions

Parallel conductor cable   Coaxial cable

YES   **NO**

Use a single pair (parallel) cable. Coaxial cable or 2 separate wires can not be used.

When existing doorbell or chime wires must be used, locate and disconnect the bell transformer from the wires. Extra pair (s) in the installed cable to video door station can affect the image quality, and must be terminated with a 120 ohm resistor at each end of wires on both video door station and video monitor (s).

Taking SG terminal on MY-1CD to earth may help, if noise exists in communication.

120 ohm   120 ohm

A1   A1
A2   A2

4 WALL-MOUNTING

MY-1CD video-monitor is supplied with wall-mounting bracket, which is attached on back of unit.

Wall-mounting

Attach mounting bracket to single gang box or to wall surface.
Terminate wire on A1, A2 terminals. Then, connect DC 18V wires from power supply.
Insert the prongs of the bracket, into the holes of the MY-1CD, aligning at the marks. Pull the unit downward until it locks.
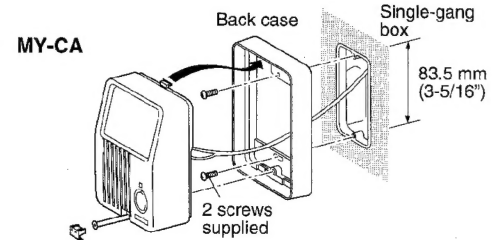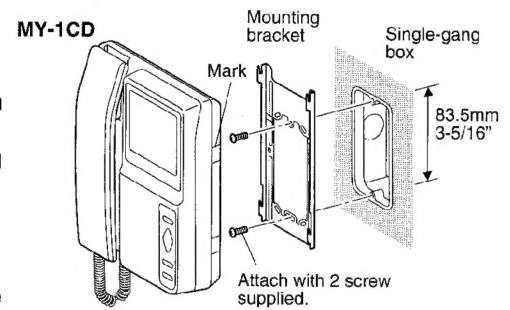
Placing on desk-top

The low-height base support is supplied with screws. Install the cable not too tensely and in non-tripping manner.

Power supply

Locate the power supply within a convenient distance to an AC outlet.
Mounting bracket and screws are supplied.

PanTilt door stations

Any PanTilt door station may be used with MY-1CD one-room monitor.
MY-DC or MY-DG semi-flush mounts on 3-gang box (92mm, 3-5/8" pitch). MY-CA surface-mounts on single-gang box (83.5mm, 3-5/16" pitch).
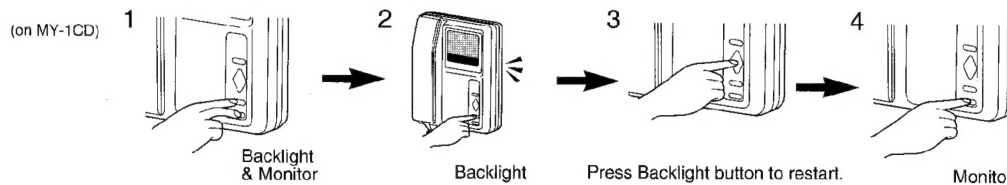
MY-CA Camera Angle Setting

MY-CA camera returns to center position at start of next operation.
The camera angle can be reprogrammed to a direction matching to the site.

Turn on video monitor. About after 10 seconds, press both Monitor & Backlight buttons.
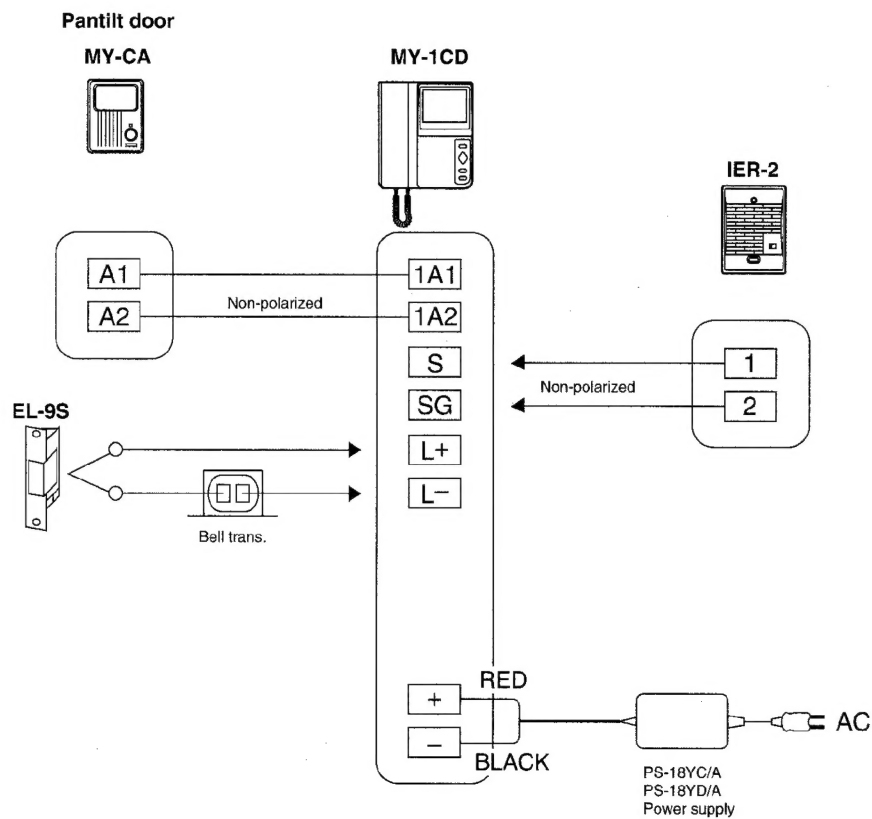Releasing from Monitor button, keep depressing Backlight button.
Approx. 5 seconds after, the bottom 1/4 of the screen starts flashing.
Then, release Backlight button.
Operate Pan-and-Tilt control pad to move the camera to desired position.
Lastly, press Monitor button.

5 WIRING

Pantilt door

MY-CA

MY-1CD

IER-2

| A1 | | 1A1 |
| A2 | Non-polarized | 1A2 |

S

SG   Non-polarized   1

L+   2

L−

EL-9S

Bell trans.

RED

| + |
| − |

BLACK

AC

PS-18YC/A
PS-18YD/A
Power supply

MY-1CD can be powered by a power supply PS-18YC/A (AC 120V) or PS-18YD/A (AC 220-240V).
When PS-18YC or PS-18YD is used, plug in to DC receptacle provided on back of MY-1CD.
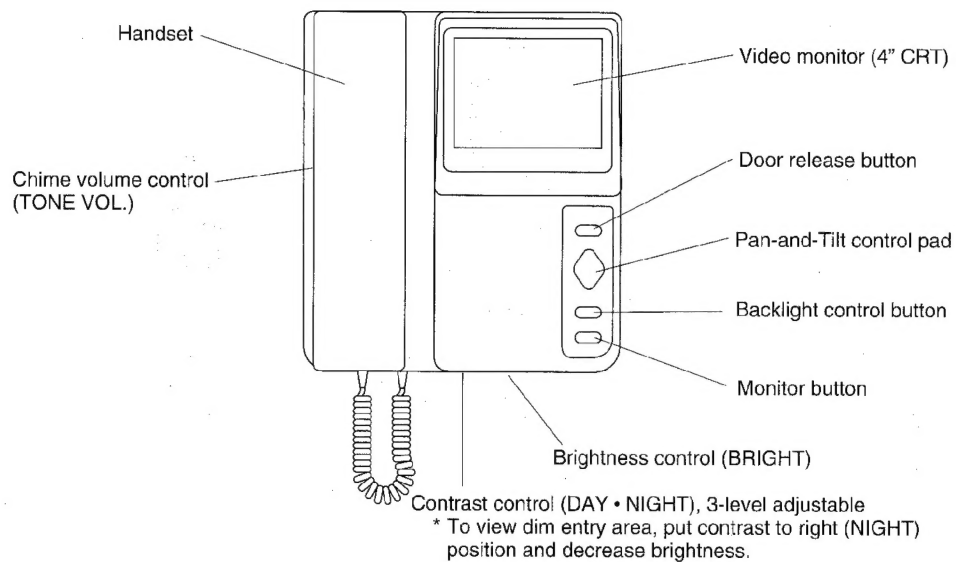
Wiring

Install 2 nonpolarized parallel conductors. When
existing cable installation is used, check if the
image is clear and unaffected, before actually
mounting the unit.

Wiring distance

MY-1CD to PanTilt door station;

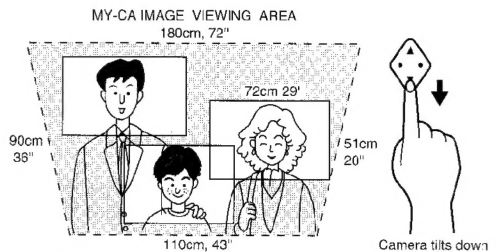| Diameter	0.65mm	1.0mm
Distance	50m	100m

AWG	22AWG	18AWG
Distance	165'	330'

Handset

Video monitor (4" CRT)

Chime volume control (TONE VOL.)

Door release button

Pan-and-Tilt control pad

Backlight control button

Monitor button

Brightness control (BRIGHT)

Contrast control (DAY • NIGHT), 3-level adjustable
* To view dim entry area, put contrast to right (NIGHT) position and decrease brightness.

Pan-and-Tilting the door camera

MY-1CD monitor station is equipped with Aiphone's exclusive Pan-and-Tilt control pad. When you received a door station call or monitor the entry, operate to move the camera up to down, side to side. PanTilt door station employs infrared CCD camera, which transmits image of entry in less than 1 Lux of light. At this time, press **Backlight** control button to identifiably add more contrast to the image.

MY-CA IMAGE VIEWING AREA
180cm, 72"
72cm 29"
90cm 36"
51cm 20"
110cm, 43"
Camera tilts down

Door answering

When Call button is momentarily pressed at PanTilt door station, chime tone sounds in 4-stroke, and image of a caller is on the monitor. Use Pan-and-Tilt touch-key control pad to locate a caller in the center of monitor. When door release is included; After verifying a caller, press and hold down door release (key-mark) button.

Video monitoring (for approx. 2-1/2 minutes)

Press Monitor button, which activates the door camera, seeing the image of entry. Press Monitor button again to turn off the monitor.

Other Operations

★ A door station call-in is held with a image on MY-1CD monitor for approx. 45 seconds.
★ Monitor audibly and visually PanTilt door station by picking up the handset on the MY-1CD.

7 BEFORE ASKING FOR REPAIR

★ In case the system does not provide a satisfactory performance, check possible causes, such as; Unplugged? Disconnected wire? Shorted wire? If you still cannot find the cause, consult the dealer or distributor that you purchased the product from.
★ Do not attempt to open front case of MY-1CD, without first unplugging power supply. High voltage is present on the monitor unit inside.
★ Refrain from spraying water at the door station directly, regardless that the unit is designed to be weather-resistent.
★ Clean your MY-1CD equipment by a soft cloth dampened with neutral household cleanser.
★ When the temperature outside lowers rapidly (after rain, etc.), the camera lens may be fogged and offer a dim image at the video monitor. This is not a malfunction, and will return to normal shortly.

8 SPECIFICATIONS

Power source	MY-1CD; DC 18V. Use a power supply PS-18YC/A (AC 120V) or PS-18YD/A (AC220~240V).
Consumption	0.9A max. 0.04A (standby)
Communication	Simultaneous with handset
Calling	Call button on door station or Monitor button on room monitor station activates door camera, and projects infrared up to 50 cm (20") on MY-CA.
Call tone	Electronic chime tone, 4-stroke, adjustable
Video monitor	4" direct view flat CRT
Scanning line	525 lines
Dimensions (H x W x D)	210 x 186 x 57.5 (mm). 8-1/4" x 7-5/16" x 2-1/4".
Weight:	1,100g (2.43 lbs.) approx.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful inteference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Reorient or relocate the receiving antenna.   • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.   • Increase the separation between the equipment and receiver.   • Consult the dealer or an experienced radio/TV technician for help.